




Sava

LIFTING BAGS

**NEW LINE
OF LIFTING BAGS**
(SLK 8 bar, SLK-H 10 bar,
Flat bags 8 bar)

NEW

Unique Savatech
surface for
optimal stability
and safety

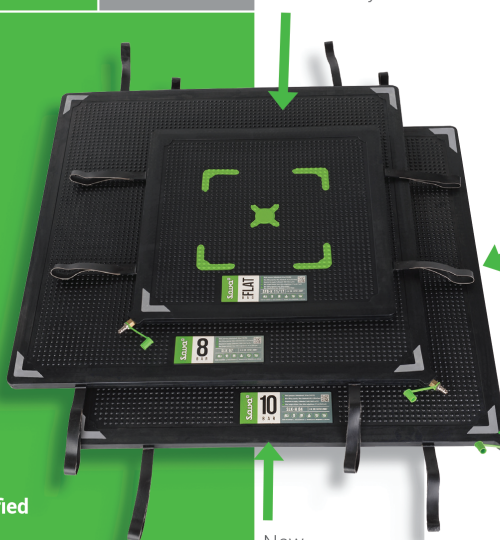

Unique Savatech
protective
rubber edge

Reflective
edge marks

We meet and exceed
EN 13731:2007 standard – certified
by independent institution

New
labels

Savatech d.o.o. presents new line of lifting bags, ranged from 8 to 10 bars. Environmental awareness is important for us, therefore we have reduced the CO2 consumption in the process of the production. Due to reduced thickness and total weight, the performance of the bags is better than ever. In addition to this, bags have many other unique qualities.



UNIQUE
SAVATECH
PROTECTIVE
RUBBER EDGE



THINNER
DESIGN
FOR EASIER
INSERTION




LIGHTER BAGS
FOR EASIER
MANIPULATION
(up to 15%)



SLK 8 bar



SLK-H 10 bar



Flat bag 8 bar

"Makin' the Hard Jobs Easy"



LIFTING BAGS

Technical data:

8 bar- SLK

Type	EU/USA	SLK 1	SLK 3	SLK 6	SLK 10	SLK 14	SLK 21	SLK 25	SLK 33	SLK 45	SLK 55	SLK 70
Product number		77973	77974	77975	76734	76735	76736	76737	76738	76739	76794	573241
Size	cm	15 x 15	22.5 x 22.5	30 x 30	38 x 38	45 x 45	55 x 55	61 x 61	69 x 69	78 x 78	87 x 87	94,5 x 94,5
Thickness	mm	25	25	25	25	25	25	25	25	25	25	26
Weight	kg	0.55	1.25	2	3.5	5	7	9	11	14	18	22.5
Max. lifting capacity	t	0.8	2.7	5.5	10.1	13.5	21.1	25.2	33	44.6	55	70.4
	Tons	0.9	3.0	6.1	11.1	14.9	23.2	27.7	36.3	49.1	60.5	77.4
Working pressure	bar	8	8	8	8	8	8	8	8	8	8	8
	psi	116	116	116	116	116	116	116	116	116	116	116
Required air supply	L	5	15	42	86	152	296	508	621	921	1305	1505
	cu./Ft.	0.18	0.53	1.48	3.04	5.37	10.45	17.94	21.93	32.53	46.09	53.15
Max. height inflated	cm	8	13	16	21	25	30	34	38	42	47	52
	inch	3.1	5.1	6.3	8.3	9.8	11.8	13.4	15.0	16.5	18.5	20.5

8 bar - SLK - L

Type	EU/USA	SLK-L 9	SLK-L 13	SLK-L 20	SLK-L 24
Product number		519833	519834	519837	77983
Size	cm	30 x 45	37,5 x 50	37,5 x 75	32 x 102
Thickness	mm	25	25	25	25
Weight	kg	3.3	4.5	6.5	7.8
Max. lifting capacity	t	8.9	13.2	20.2	24
	Tons	9.8	14.5	22.2	26.4
Working pressure	bar	8	8	8	8
	psi	116	116	116	116
Required air supply	L	95	170	270	220
	cu./Ft.	3.35	6.00	9.54	7.77
Max. height inflated	cm	19	23	23	20
	inch	7.5	9.1	9.1	7.9

8 bar - SFB - K

Type	EU/USA	SFB-K 7/17	SFB-K 10/17	SFB-K 20/17	SFB-K 33/17
Product number		519883	519884	519885	519886
Size	cm	55 x 55	61 x 61	78 x 78	91,5 x 91,5
Thickness	mm	25	25	25	25
Weight	kg	7	9	14	20
Max. lifting capacity	t	21.1	25.2	44.6	64
	Tons	23.2	27.7	49.1	70.4
Working pressure	bar	8	8	8	8
	psi	116	116	116	116
Required air supply	L	224	350	520	810
	cu./Ft.	7.91	12.36	18.36	28.61
Max. height inflated	cm	17	17	17	17
	inch	6.7	6.7	6.7	6.7
Max. lifting capacity at max. lifting height	t	6.7	10.9	17.7	31.8
	Tons	7.4	12.0	19.5	35.0

10 bar - SLK - H

Type	EU/USA	SLK-H 1	SLK-H 4	SLK-H 7	SLK-H 12	SLK-H 17	SLK-H 26	SLK-H 32	SLK-H 41	SLK-H 56	SLK-H 69	SLK-H 88
Product number		291240	291241	291242	291243	291244	291245	291246	291247	291248	291249	291250
Size	cm	15 x 15	22.5 x 22.5	30 x 30	38 x 38	45 x 45	55 x 55	61 x 61	69 x 69	78 x 78	87 x 87	94,5 x 94,5
Thickness	mm	25	25	25	25	25	25	25	25	25	25	26
Weight	kg	0.55	1.25	2	3.5	5	7	9	11	14.1	18.2	22.7
Max. lifting capacity	t	1	3.3	6.8	12.1	16.6	26.3	31.8	41.3	55.8	68.7	88
	Tons	1.1	3.6	7.5	13.3	18.3	28.9	35.0	45.4	61.4	75.6	96.8
Working pressure	bar	10	10	10	10	10	10	10	10	10	10	10
	psi	145	145	145	145	145	145	145	145	145	145	145
Required air supply	L	7	19	52	106	186	362	508	759	1122	1595	1650
	cu./Ft.	0.25	0.67	1.84	3.74	6.57	12.78	17.94	26.80	39.62	56.33	58.27
Max. height inflated	cm	8	13	16	21	25	30	34	38	42	47	52
	inch	3.1	5.1	6.3	8.3	9.8	11.8	13.4	15.0	16.5	18.5	20.5

"Makin' the Hard Jobs Easy"