



Savatech plugs of smaller diameters PLUGY Z and PLUGSY S can be used in all types of pipelines. Since these plugs are not reinforced with cord, they exhibit excellent stretching and sealing characteristics in pipe diameters from 20 mm up to 305 mm. Plugs are equipped with a car tyre inflation valve and can be inflated with a standard tyre pump. An eyebolt with a chain and a specially designed handle simplify manipulation of the plug.




Extra short for easier insertion

Available in usage ranges from 20 mm up to 305 mm

Also available in oil-resistant quality


Perfect for plumbers

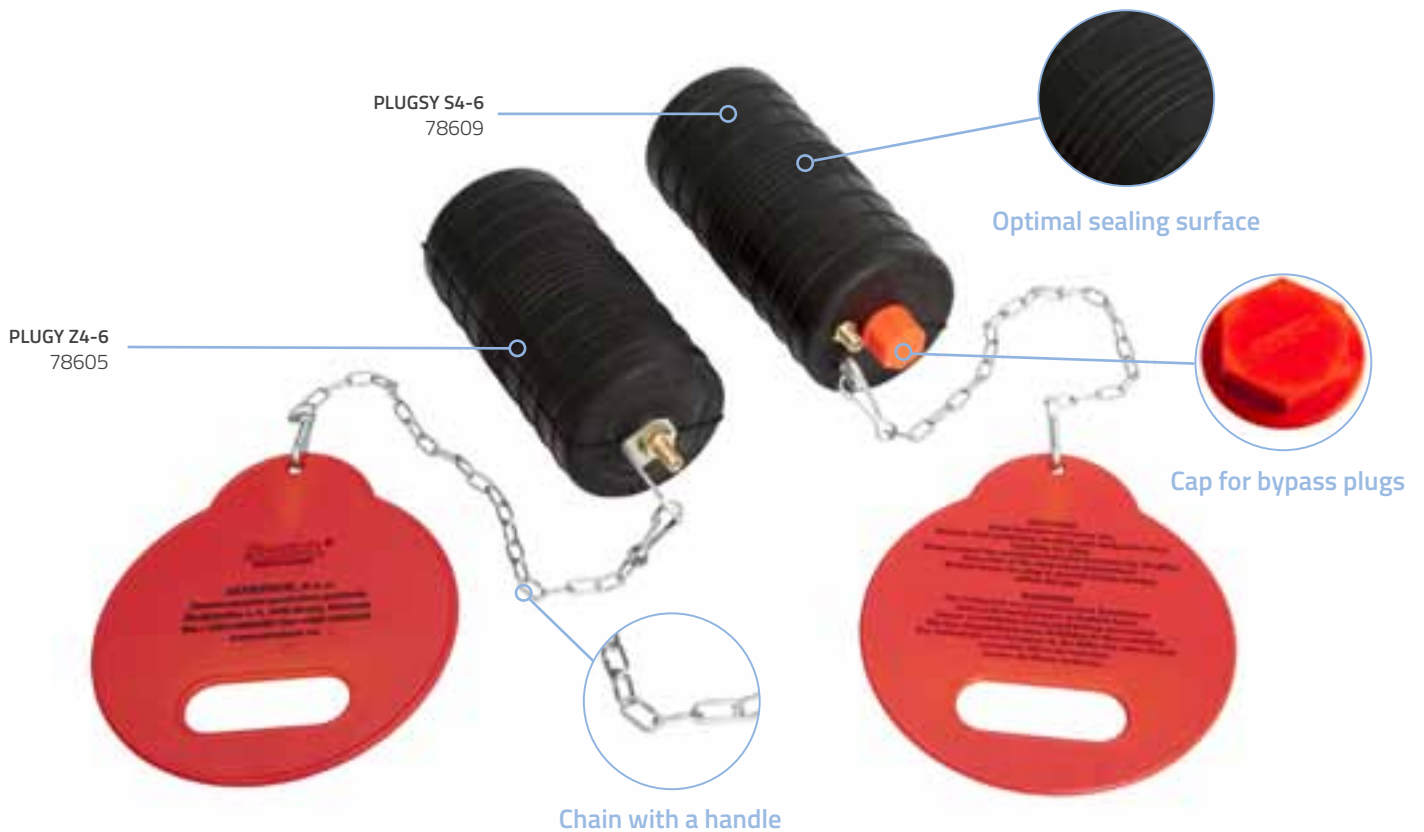

ACCESSORIES



INFLATION HOSE, FI 6 MM,
2 M, 0.2 KG 78904
5 M, 0.5 KG 78905



HAND PUMP
0.8 KG
60010



REPLACEMENT CAPS
CAP 1/8" 539897
CAP 1/2" 539898
CAP 1" 539899
CAP 2" 538797
CAP 4" 539900

PLUGS OF SMALLER DIMENSIONS – PLUGY Z AND PLUGSY S

1. 1.

PLUGY Z - BLOCKING PLUGS

PART NUMBER	NOMINAL SIZE	SIZE USAGE RANGE		REQUIRED INFLATION PRESSURE (BAR)	DEFLATED PLUG		PRODUCT WEIGHT (KG)	EYE BOLT	
		MIN. DIA. (MM)	MAX. DIA. (MM)		DIAMETER (MM)	RUBBER LENGTH (MM)		M THREAD	INFLATION VALVE THREAD SIZE
508123	Z1	20	33	2.5	19	65	0.01	NA	R 1/8"
60022	Z1 1/2	33	40	2.5	32	70	0.09	NA	R 1/4"
78582	Z2	50		2.5	45	72	0.11	NA	R 1/4"
78603	Z2-3	50	75	2.5	45	80	0.12	NA	R 1/4"
76767	Z3	75		2.5	70	85	0.23	NA	R 1/4"
78604	Z3-4	75	100	2.5	70	100	0.25	NA	R 1/4"
76769	Z4	100		2.5	85	145	0.43	NA	R 1/4"
78605	Z4-6	100	150	2.5	85	165	0.47	NA	R 1/4"
76771	Z6	150		2.5	142	190	1.23	NA	R 1/4"
78606	Z6-8	150	200	2.5	142	220	1.32	NA	R 1/4"
60616	Z8	175	204	2.5	174	220	2.1	6	R 1/4"
60618	Z10	219	254	2.5	218	250	3.4	6	R 1/4"
60619	Z12	275	305	2.5	274	290	5.1	6	R 1/4"

PLUGSY S - BYPASS PLUGS

PART NUMBER	NOMINAL SIZE	SIZE USAGE RANGE		REQUIRED INFLATION PRESSURE (BAR)	DEFLATED PLUG		PRODUCT WEIGHT (KG)	EYE BOLT		INFLATION VALVE	BYPASS DIAMETER (FEMALE)
		MIN. DIA. (MM)	MAX. DIA. (MM)		DIAMETER (MM)	RUBBER LENGTH (MM)		M THREAD	THREAD SIZE		
78607	S2	50		2.5	45	80	0.2	NA	R 1/8"	1/8"	
76768	S3	75		2.5	70	85	0.34	6	R 1/8"	1/2"	
78614	S3-4	75	100	2.5	70	100	0.43	6	R 1/8"	1/2"	
76770	S4	100		2.5	85	145	0.6	6	R 1/8"	1/2"	
78609	S4-6	100	150	2.5	85	165	0.73	6	R 1/8"	1/2"	
76772	S6	150		2.5	142	190	2.13	6	R 1/8"	1"	
78610	S6-8	150	200	2.5	142	220	2.38	6	R 1/8"	1"	
60621	S8	175	204	2.5	174	240	3.3	6	R 1/4"	2"	
60622	S10	219	254	2.5	218	300	4.7	6	R 1/4"	2"	
60623	S12	275	305	2.5	274	350	7.4	6	R 1/4"	2"	

BACK PRESSURES (bar)* - PLUGY Z, PLUGSY S

PLUG SIZE	PIPE DIAMETER (MM)									
	25	40	50	75	100	150	200	250	300	
1"	2.2									
1 1/2"		2.2								
2"			1.8							
2"- 3"			2	1.5						
3"				1.5						
3"- 4"				1.8	1.2					
4"					1.9					
4"- 6"					1.9	1.6				
6"						2.2				
6"- 8"						2.2	1.4			
8"							1.3			
10"								1.5		
12"									1.8	

* measured in a dry iron pipe