

# DS11 UNDERWATER DIAMOND CHAIN SAW

**STANLEY**<sup>®</sup>



The **DS11** Diamond Chain Saw is specifically designed to cut solid concrete underwater. Cuts square corners without over-cut and can plunge cut sea walls up to 18" thick. Two available bar lengths (15" and 18") and two different chains depending on the amount of rebar and hardness of the concrete. A minimum of 20 PSI water pressure is required at the saw for cooling and lubrication of the bar and chain. Painted hi-visibility yellow.



## FEATURES

- Direct drive motor - no chain coast when trigger is released
- Integral Stanley Hyrevz gear motor for durability and power
- Trigger activated water to bar and chain for lubrication
- Multi position trigger handle and Wall Walker reduces diver fatigue
- Heavy duty cast aluminum
- Cut steel reinforced concrete with Pinnacle chain
- Stainless Steel spool and fasteners
- Interlocking safety trigger and hand guard
- Pinnacle Chain: For Steel Reinforced, Heavy Aggregate Concrete
- Ultra Chain - For Light Wire Mesh, Soft/Green Concrete
- Order bar and chain separately – See Chart for Selection

## SPECIFICATIONS

<b>Capacity</b>	15 or 18" / 38 or 45 cm Bar
<b>Chain Type</b>	Diamond Impregnated Chain Segments
<b>Circuit Type</b>	Open Center
<b>Flow Range</b>	12 gpm / 45 lpm
<b>Working Pressure</b>	1000-2000 psi / 70-140 bar
<b>Full Relief Setting</b>	2250 psi / 155 bar
<b>Weight (less bar &amp; chain)</b>	28 lbs / 12.7 kg
<b>Length (with bar &amp; chain)</b>	37 or 40" / 99 or 101.6 cm
<b>Width</b>	9" / 23 cm
<b>Couplers</b>	Yes
<b>Hose Whips</b>	Yes (1/2" NPT Male Thread)
<b>Lubrication/Cooling</b>	Internal Water Channels in Bar

**Phone 0800 48 2000**

**SALES • SERVICE • HIRE • CALIBRATION**

The chart below will assist in chain selection for balance of cutting performance and chain life

Aggregate	Extra Hard		Hard		Medium		Soft		Abrasive
Material	Chert Flint	Basalt Quartz	Granite River Rock	Marble Limestone	Sandstone				Masonry, Brick, Block, Green Concrete
Approximate Moh's Scale	9	8	7	6	5	4	3		
Reinforcing Steel	Lots of Steel				Some Steel				No Steel
	1"	Double Mat	Single Mat	#5	#4	#3	Wire Mesh		

### Saw Chain Wear (in-ft)

Pinnacle-32 Pinnacle-39	150 in-ft	600-800 in-ft	2000 in-ft
Ultra-32 Ultra-37		2000 in-ft	1500 in-ft

## ORDERING INFORMATION

### PART NUMBER

**DS115000** Diamond Chain Saw, Underwater, No Bar & Chain  
Order Bar and Chain Separately Below


### ACCESSORIES

30305	15" Bar, Sprocket Nose
56801	15" Diamond Chain, Ultra 32
56803	15" Diamond Chain, Pinnacle, 32
30306	18" Bar, Sprocket Nose
56802	18" Diamond Chain, Ultra 37
58632	18" Diamond Chain, Pinnacle, 37
03971	Flush-Face Coupling Set, 3/8" NPT
03974	Flush-Face Coupling Set, 1/2" NPT
06830	Hose Whip 18" Long, -8 SAE x 1/2" NPT
23517	Sprocket Wrench
31848	Dual Hose, 50' x 1/2", with couplers
31972	Dual Hose, 25' x 1/2", with couplers
58633	Twinned Hose, 25' x 1/2", with couplers
58634	Twinned Hose, 50' x 1/2", with couplers
20859	Diamond Chain Butterfly Repair Kit
20857	Chain Repair Spinner
20858	Chain Repair Breaker
DCP30101	Water Pump, 12 VDC, Battery Clip
DCP30100	Water Pump, 12 VDC, Marine Type Plug

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

### IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit [stanleyhydraulic.com](http://stanleyhydraulic.com) and select the Warranty tab.

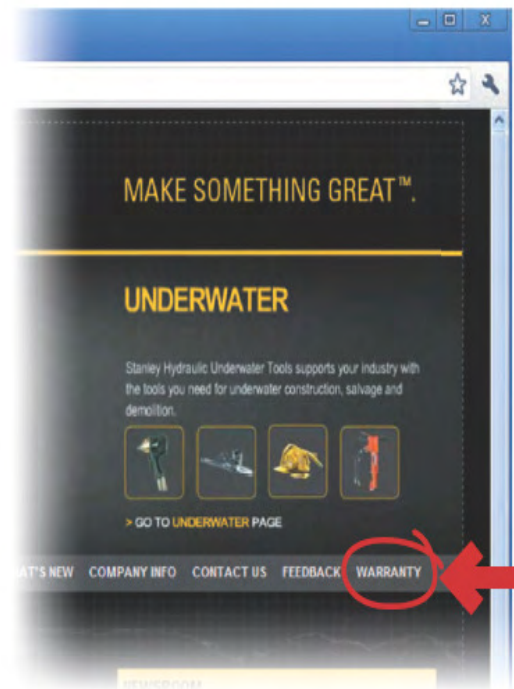

**Note:** The warranty recording form must be submitted to validate the warranty.

## Phone 0800 48 2000

SALES • SERVICE • HIRE • CALIBRATION